


Four Flute

LC
 AlCrN coated
 Super Micrograin Carbide
Tolerance
 D 1,0 - 5,0 +0 / -0,020
 D 6,0 - 7,0 +0 / -0,025
 D 8,0 - 9,0 +0 / -0,030
 D 10,0 - 12,0 +0 / -0,035
 D 16,0 - 20,0 +0 / -0,040
Shank
 Cylindrical h6, DIN6535 HA
Flute
 35° right hand spiral, center cutting
Field of application
 All types of steel up to HRC55



D mm	d mm	Part Number	l mm	L mm	Cutting edges	
2,0	4	M0402D6_LC	6	50	4	
3,0	4	M0403D8_LC	8	50	4	
3,0	6	M0603D8_LC	8	57	4	
4,0	4	M0404D11_LC	11	50	4	
4,0	6	M0604D11_LC	11	57	4	
5,0	6	M0605D13_LC	13	57	4	
6,0	6	M0606D16_LC	16	57	4	
6,0	6	M0606D26_LC	26	72	4	NEW
7,0	8	M0807D18_LC	18	63	4	NEW
8,0	8	M0808D20_LC	20	63	4	
8,0	8	M0808D32_LC	32	83	4	NEW
10,0	10	M1010D25_LC	25	72	4	
10,0	10	M1010D40_LC	40	92	4	NEW
12,0	12	M1212D30_LC	30	83	4	
12,0	12	M1212D48_LC	48	100	4	NEW
16,0	16	M1616D34_LC	34	92	4	NEW
20,0	20	M2020D40_LC	40	100	4	NEW

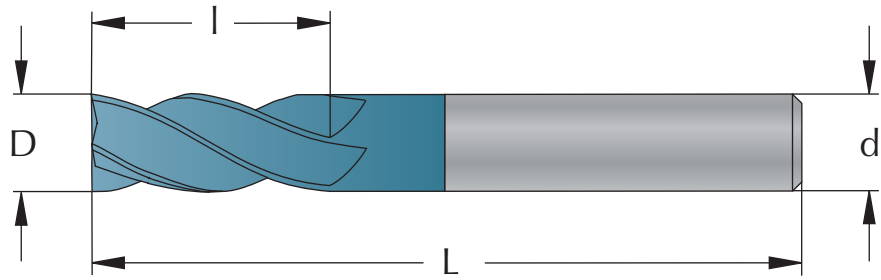